



ROMEX® DEKO FIX

DIY Gravel Binder


Product ID: 1 liter #2642 | 5 liter #2643

ROMEX DEKO FIX is an easy way to lock loose stones, gravel, or grit in place without heavy tools or time-consuming work. No more scattered stones on your lawn, patio, or even indoors. Use it to stabilize gravel and create a clean, low-maintenance surface that looks great and stays put, with no loose pieces shifting or getting tracked around.

Ideal for pathways and drainage strips.

- Topical application
- Highly permeable
- Pet and plant friendly
- Preserves the natural appearance of the stones

NO MIX REQUIRED



Apply on top of existing stones or aggregate



Easy to Use



Pressure Washer Safe



Pet Friendly



Weed Resistant



Topical Application

1-844-529-2330 | www.romexhardscapes.com | info@romexhardscapes.com

ROMEX® DEKO FIX

DIY Gravel Binder

APPLICATION

Site Requirements: The substrate must be water-permeable and free of settlement. To ensure reliable adhesion, the stones should be clean and dust-free because dust and moisture can significantly reduce the binding force. For added weed protection, install a weed barrier under the gravel, and mask or protect adjacent areas that should not be treated to prevent splashes.

Preparation: Protect surrounding surfaces with cardboard or plastic sheeting and have the right application tool ready so you can distribute the product evenly (a pressure sprayer or watering can work). Before starting, confirm the gravel or grit surface is dry, and the stone is clean and free of dust so the binder can adhere properly.

Application: For the spray method, shake the container well and pour the product into a pressure sprayer. Apply it to a dry surface at a rate of **approximately 200 to 250 ml/m² or 163 to 204 ft²/gal, per application**. Spray evenly until all stones are fully coated, taking care not to oversaturate. Use a rake to turn and mix the stones to expose any uncoated material, then apply a second coat until the surface is evenly covered. Compact the surface by pressing down and lightly tapping with a trowel. After about 24 hours, apply a third coat as a sealing pass without any additional turning or compacting. The spray method is completed in three steps.

For the mixing method, shake the container well and add the product to a mixing container with the stones at a **ratio of 1 quart or 1 litre per 55 lbs or 25 kg of grit or gravel**. Mix until the material is evenly moistened. Place the mixture, spread it with a trowel, and compact by pressing down and lightly tapping. After about 24 hours, the surface may optionally be sealed by spraying until the stones are fully wet.

Professional Tip: Each additional sealing of the surface increases strength. For surfaces that will see heavier wear, use a professional grit and gravel binder such as ROMEX® - PROFI-DEKO or ROMEX® - PURE +.


Subsequent Treatment: After the final application, do not walk on or stress the surface for at least 24 hours so it can cure and reach optimum strength. For permanently stable surfaces, repeat the application every 12 to 24 months in areas subject to heavy use, while purely decorative areas typically only need refreshing every 24 months to maintain stability and appearance.

Important Information: This product is not suitable for driveways, high-traffic areas, or use under furniture. Wear impermeable protective gloves when working, rinse the pressure sprayer thoroughly with warm water after use to prevent clogging, and clean any spills immediately with a wet sponge to avoid residue or staining. The brochure information is non-binding and may change.

Weather Warning: Unfavourable weather can negatively affect results, so review product labels, instructions, and climatic restrictions before starting. The outside temperature must be at least 45°F | 7°C, relative humidity should not exceed 85%, and there should be no rain forecast. Protect the fresh surface from rain for 24 to 36 hours (without covering it directly so air can circulate), and ideally plan for about 48 hours of dry, warm weather after application to support optimal curing.

Recommended stone sizes & substrate depth		
Stone sizes	Structure height	Result
1/8" - 1/4" 2-5 mm	3/4" 20 mm	Best results
1/4" - 5/8" 5-16 mm	3/4" - 1 1/4" 20-30 mm	Good results
From 5/8" 16 mm	From 1 1/4" 30 mm	Not recommended

1-844-529-2330 | www.romexhardscapes.com | info@romexhardscapes.com

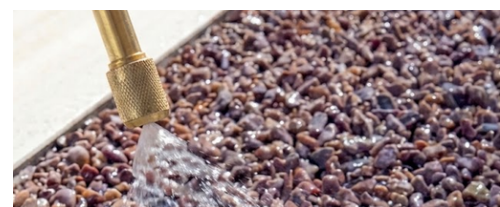

SPRAY SURFACE

Spray the gravel surface using the bottle or a spray nozzle.



MIXING

Turn and mix the stones with a rake to expose uncoated material.



SPRAY SURFACE

Spray the gravel surface again using the bottle or a spray nozzle.



COMPACT

Compact by pressing down and lightly tapping with a trowel.



FINAL COAT

After about 24 hours, apply a third coat as a sealing pass.



**CALL BEFORE
YOU INSTALL**

@romexhardscapes

