ROMEX® SYSTEM

Resin Surfacing Control Joint

ROMEX FLEX JOINT lets the ROMEX PROFI-DEKO surface move without cracking. A 1" (25 mm) PROFI-DEKO cap hides the joint, and the whole assembly sits on a permeable ASTM #57 aggregate base.

ROMEX® HARDSCAPES

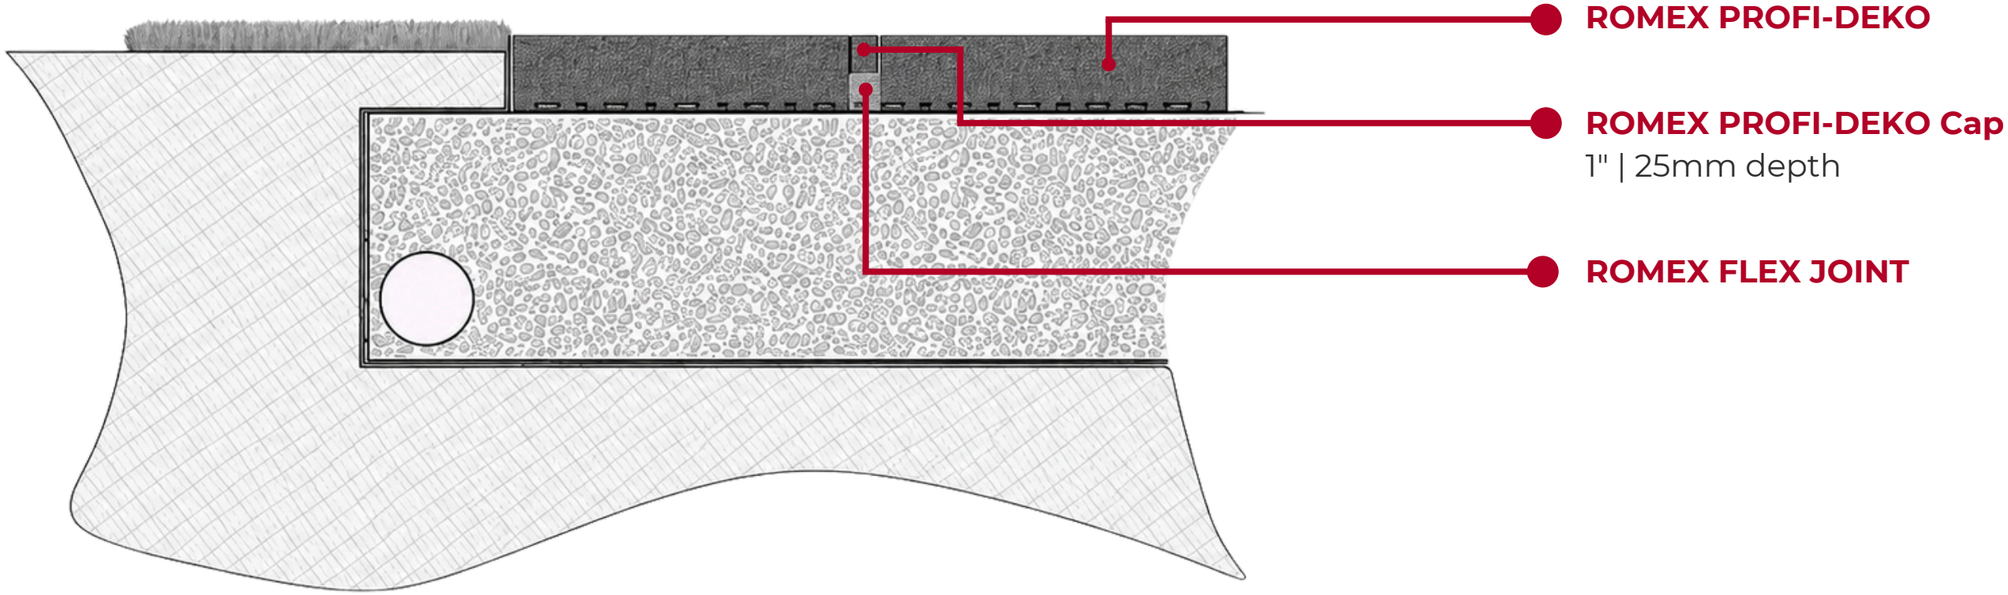

1-844-529-2330 | www.romexhardscapes.com | info@romexhardscapes.com